



VERSA 2

Pre-Engineered Robotic Welding Solutions

For Welding Low to Medium-Volume Production Parts & High Changeover Applications

Versa 2 Weight Capacity: 2,000-lbs (per station)


Reduce Downtime During Fixture Changeover

A pre-engineered two-station robotic welding system that allows multiple part numbers to run simultaneously, the Genesis Versa 2 and Versa 2H (higher weight capacity) are designed for low to medium part volumes and high changeover applications.


- ✓ Reduces downtime during fixture changeover
- ✓ Can run multiple part numbers simultaneously
- ✓ Able to accommodate large tool lengths and swing diameters
- ✓ Configurable to meet application requirements

VERSA 2

TOP VIEW

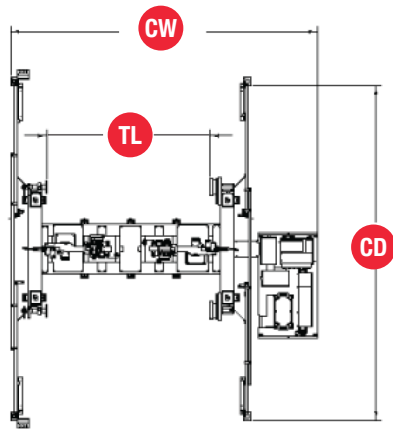

SIDE VIEW

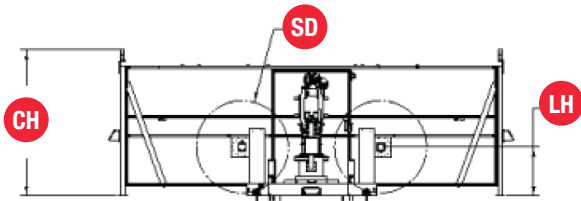

Standard Dimensional Specifications

- TL Tool Length:** 96-inches (2438-mm)
- SD Tool Swing Diameter:** 54-inches (1371-mm)
- LH Load Height:** 36-inches (914-mm)
- CW Cell Width:** 215-inches (5460-mm)
- CD Cell Depth:** 195-inches (4978-mm)
- CH Cell Height:** 92-inches (2336-mm)

Standard Component Options

- Robot models:** FANUC, Panasonic, Yaskawa Motoman, ABB
- Process gear:** Miller, Lincoln, Fronius
- Welding torches:** TBi, Tregaskiss, Abicor Binzel, Fronius
- Torch cleaners:** TBi, Tregaskiss, Abicor Binzel
- Controls:** Allen-Bradley

Platform Specifications

	BASE	OPTIONAL
Minor axis	dual servo driven trunnions	
Tool length	96-inches (2.4-meters)	120-inches (3.0-meters)
Tool swing diameter	54-inches (1.4-meters)	60-inches (1.5-meters)
Weight capacity	2,000-lbs (907-kilograms)	3,000-lbs (1,360-kilograms)